



*DC COMPONENTS CO., LTD.*

RECTIFIER SPECIALISTS

DL4148  
THRU  
DL4448

**TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SWITCHING DIODES**

VOLTAGE - 50 to 100 Volts

CURRENT - 0.15 to 0.2 Ampere

**FEATURES**


- \* Silicon epitaxial planar diodes
- \* Low power loss, high efficiency
- \* Low leakage
- \* Low forward voltage
- \* High speed switching
- \* High current capability

**MECHANICAL DATA**

- \* Case: Glass sealed case
- \* Terminals: Solder plated, solderable per MIL-STD-750, Method 2026 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.05 grams Approx.



Mini Melf(DL-35)

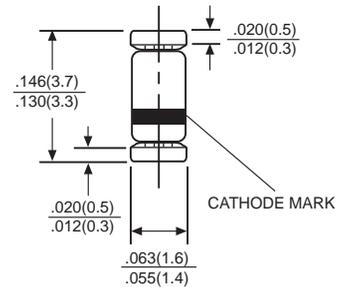

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**






Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

	SYMBOL	DL4148	DL4150	DL4151	DL4448	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>R</sub> RM	100	50	75	100	V
Maximum Average Forward Current	I <sub>F</sub> AV	150	200	150	150	mA
Maximum Power Dissipation Tamb=25°C	P <sub>tot</sub>	500	500	500	500	mW
Maximum Forward Voltage	V <sub>F</sub> @I <sub>F</sub>	1.0/10	1.0/200	1.0/50	1.0/100	V/mA
Maximum Reverse Current	I <sub>R</sub> @V <sub>R</sub>	5000/75	100/50	50/50	5000/75	nA/V
Maximum Reverse Recovery Time	t <sub>rr</sub>	4.0	4.0	2.0	4.0	nS
Repetitive Peak Forward Current	I <sub>FRM</sub>	500				mA
Peak Forward Surge Current, tp = 1µS	I <sub>FSM</sub>	2				A
Forward Continuous Current	I <sub>F</sub>	300				mA
Typical Junction Capacitance	C <sub>J</sub>	4.0				pF
Operating and Storage Temperature Range	T <sub>J</sub> ,T <sub>STG</sub>	-65 to +200				°C

# RATING AND CHARACTERISTIC CURVES (DL4148 THRU DL4448)

REF: DL4148

A Admissible repetitive peak forward current versus pulse duration

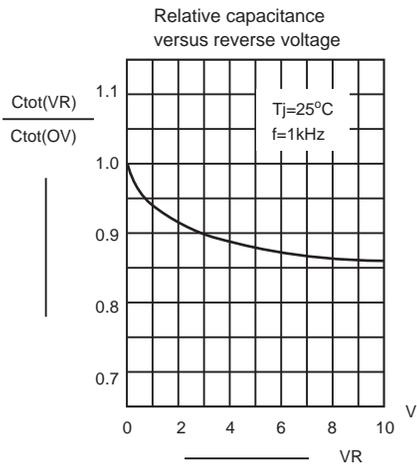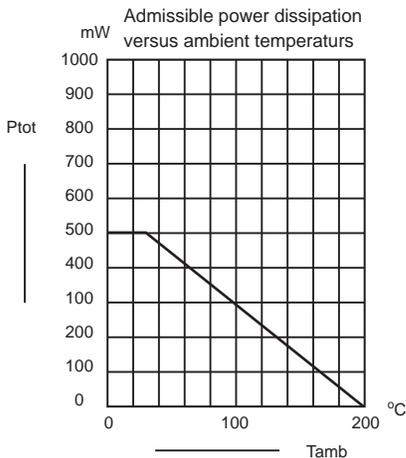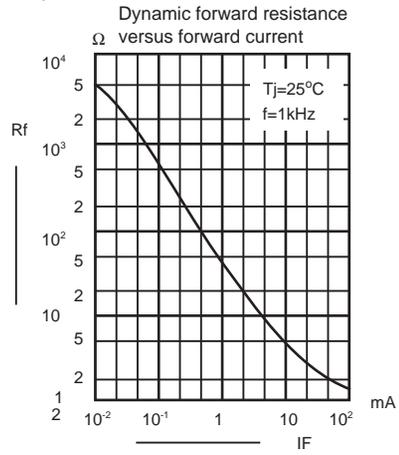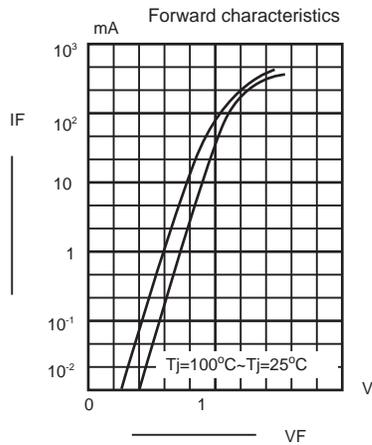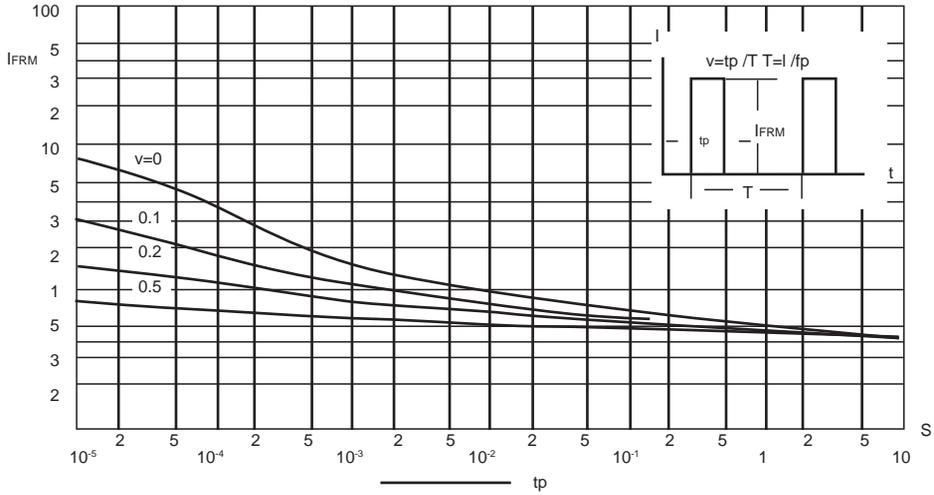

DC COMPONENTS CO., LTD.