


**IN74LS07**

## Hex Non-Inverted Buffers with Open-Collector Outputs

This device contains hex non inverted buffers with open-collector. It performs the Boolean function  $Y = A$  in positive Logic.

- High Output Voltage (30 V)
- High Speed ( $t_{PD} = 12$  ns typical)
- Low Power Dissipation ( $P_D = 13$  mW per Gate)

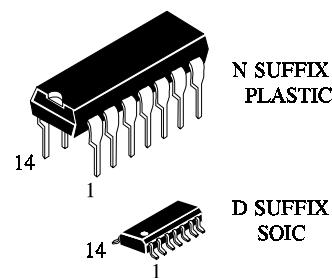


### ORDERING INFORMATION

IN74LS07N Plastic

IN74LS07D SOIC

$T_A = 0^\circ$  to  $70^\circ$  C for all packages

### LOGIC DIAGRAM

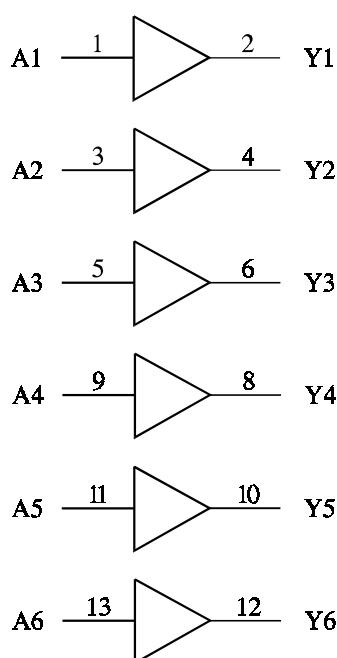

PIN 14 =  $V_{CC}$   
PIN 7 = GND

### PIN ASSIGNMENT

A1	1 ●	14	$V_{CC}$
Y1	2	13	A6
A2	3	12	Y6
Y2	4	11	A5
A3	5	10	Y5
Y3	6	9	A4
GND	7	8	Y4

### FUNCTION TABLE

Inputs	Output
A	Y
H	H
L	L

**MAXIMUM RATINGS\***

<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Unit</b>
V <sub>CC</sub>	Supply Voltage	7.0	V
V <sub>IN</sub>	Input Voltage	5.5	V
V <sub>OUT</sub>	Output Voltage	30	V
T <sub>tsg</sub>	Storage Temperature Range	-65 to +150	°C

\*Maximum Ratings are those values beyond which damage to the device may occur.  
Functional operation should be restricted to the Recommended Operating Conditions.

**RECOMMENDED OPERATING CONDITIONS**

<b>Symbol</b>	<b>Parameter</b>	<b>Min</b>	<b>Max</b>	<b>Unit</b>
V <sub>CC</sub>	Supply Voltage	4.75	5.25	V
V <sub>IH</sub>	High Level Input Voltage	2.0		V
V <sub>IL</sub>	Low Level Input Voltage		0.8	V
V <sub>OH</sub>	High Level Output Voltage		30	V
I <sub>OL</sub>	Low Level Output Current		40	mA
T <sub>A</sub>	Ambient Temperature Range	0	+70	°C

**DC ELECTRICAL CHARACTERISTICS** over full operating conditions

<b>Symbol</b>	<b>Parameter</b>	<b>Test Conditions</b>	<b>Guaranteed Limit</b>		<b>Unit</b>
			<b>Min</b>	<b>Max</b>	
V <sub>IK</sub>	Input Clamp Voltage	V <sub>CC</sub> = min, I <sub>IN</sub> = -18 mA		-1.5	V
I <sub>OH</sub>	High Level Output Current	V <sub>CC</sub> = min, V <sub>OH</sub> = max		250	μA
V <sub>OL</sub>	Low Level Output Voltage	V <sub>CC</sub> = min, I <sub>OL</sub> = 16 mA		0.4	V
		V <sub>CC</sub> = min, I <sub>OL</sub> = 40 mA		0.7	
I <sub>IH</sub>	High Level Input Current	V <sub>CC</sub> = max, V <sub>IN</sub> = 2.7 V		20	μA
		V <sub>CC</sub> = max, V <sub>IN</sub> = 5.5 V		1	mA
I <sub>IL</sub>	Low Level Input Current	V <sub>CC</sub> = max, V <sub>IN</sub> = 0.4 V		-0.2	mA
I <sub>CC</sub>	Supply Current	V <sub>CC</sub> = max	Total with outputs high	14	mA
			Total with outputs low	45	

**AC ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5.0 \text{ V}$ ,  $C_L = 15 \text{ pF}$ ,  
 $R_L = 110 \Omega$ ,  $t_r = 15 \text{ ns}$ ,  $t_f = 6.0 \text{ ns}$ )

Symbol	Parameter	Min	Max	Unit
$t_{PLH}$	Propagation Delay, Input A to Output Y		10	ns
$t_{PHL}$	Propagation Delay, Input A to Output Y		30	ns


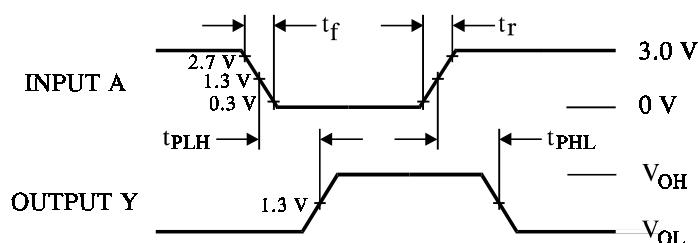


Figure 1. Switching Waveforms

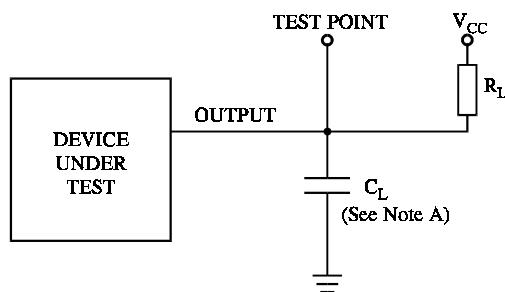

NOTE A.  $C_L$  includes probe and jig capacitance.

Figure 2. Test Circuit