

Y214/Y214A

HIGH VOLTAGE, PHOTO MOS RELAY

COSMO

FEATURES

- Normally Open, Single Pole Single Throw
- Control 400VAC or DC Voltage
- Switch 130mA Loads
- LED control Current, 5mA
- Low ON-Resistance
- dv/dt , >500V/ms
- Isolation Test Voltage, 3750VACrms

Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

Emitter(Input)

Reverse Voltage	5.0V
Continuous Forward Current	50mA
Peak Forward Current	1A
Power Dissipation	100mW
Derate Linearly from 25°C	1.3mW/ $^\circ\text{C}$





Detector(Output)

Output Breakdown Voltage	$\pm 400\text{V}$
Continuous Load Current	$\pm 130\text{mA}$
Power Dissipation	500mW

General Characteristics

Isolation Test Voltage	3750VACrms
Isolation Resistance $V_{io}=500\text{V}$, $T_a=25^\circ\text{C}$	$\geq 10^{10}\Omega$
Total Power Dissipation	550mW
Derate Linearly from 25°C	2.5mW/ $^\circ\text{C}$
Storage Temperature Range	-40°C to $+125^\circ\text{C}$
Operating Temperature Range	-30°C to $+85^\circ\text{C}$
Junction Temperature	100°C
Soldering Temperature, 2mm from case, 10 sec	260°C



- Turn on/Turn off time

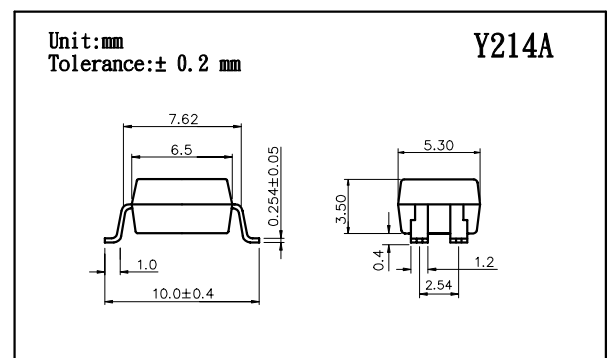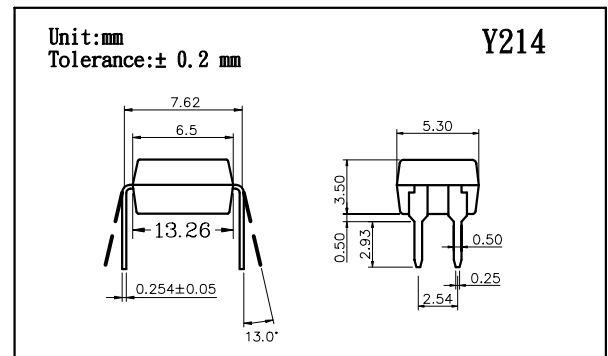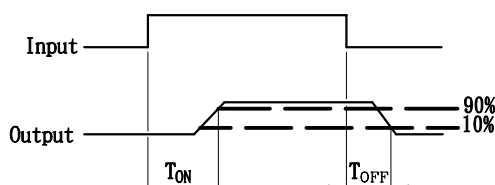

Y214/Y214A

HIGH VOLTAGE, PHOTO MOS RELAY

Characterisitcs				(Ta=25℃)		
Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Emitter(Input)						
Forward Voltage	VF		1.2	1.5	V	IF=10mA
Operation Input Current	IFON			5	mA	VL=± 20V, IL=100mA t=10mS
Recovery Input Current	IFOFF	0.2			mA	VL=± 20V, IL<=5uA
Detector (output)						
Output Breakdown Voltage	VB	400			V	IB=50uA
Output Off-State Leakage	IT(OFF)		0.2	1	uA	VT=100V, IF=0mA
I/O Capacitance	CISO		6		pF	IF=0, f=1MHz
ON Resistance	RON		20	30	Ω	IL=100mA, IF=10mA
Turn-on Time	TON		0.3	1.0	ms	IF=10mA, VL=± 20V
Turn-off Time	TOFF		0.7	1.5	ms	t=10ms, IL=± 100mA

Mos Relay Schematic and Wiring Diagrams					
Type	Schematic	Output configur- -ation	Load	Con- -nection	Wiring Diagrams
Y214 & Y214A		1a	AC/DC	—	

DATA CURVE

Load current vs. ambient temperature

Allowable ambient temperature:
-40℃ to +85℃

On resistance vs. ambient temperature

Across terminals 3 and 4 pin

LED current: 5mA




Continuouse load current: 130mA(DC)

Trun on time vs. ambient temperature

Load voltage 400V(DC)

LED current: 5mA

Continuouse load current: 130mA(DC)

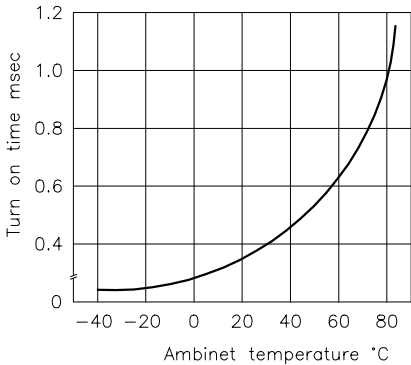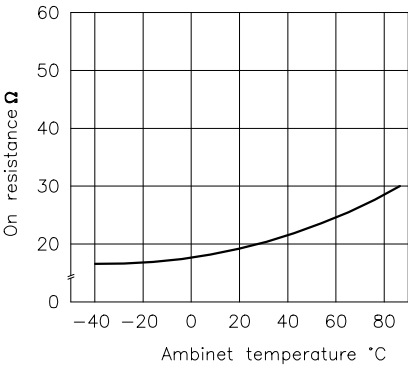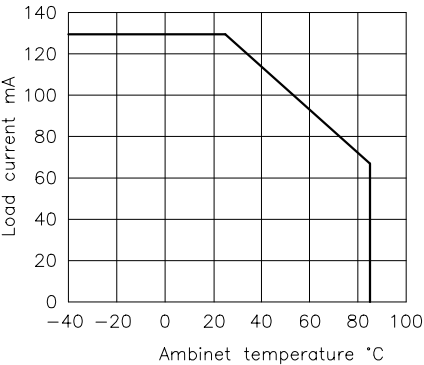


Y214/Y214A


HIGH VOLTAGE, PHOTO MOS RELAY

Y214/Y214A


Turn off time vs. ambient temperature
LED current: 5mA; Load voltage: 400V(DC)
Continuous load current: 130mA(DC)

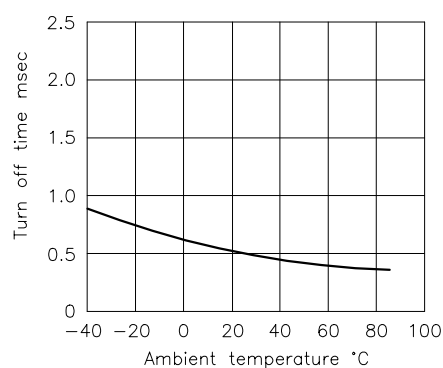


LED operate vs. ambient temperature
Load voltage: 400V(DC)
Continuous load current: 130mA(DC)

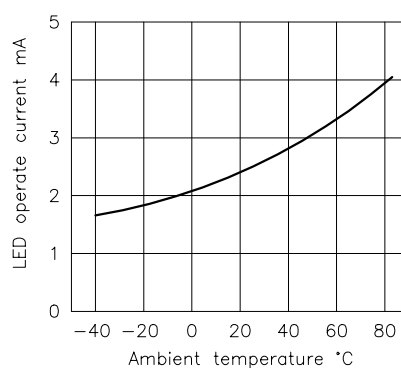


LED turn off current vs. ambient temperature
Load voltage: 400V(DC)
Continuous load current: 130mA(DC)

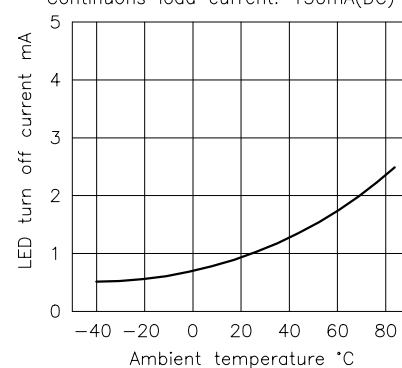


LED dropout voltage vs. ambient temperature
LED current: 5 to 50mA

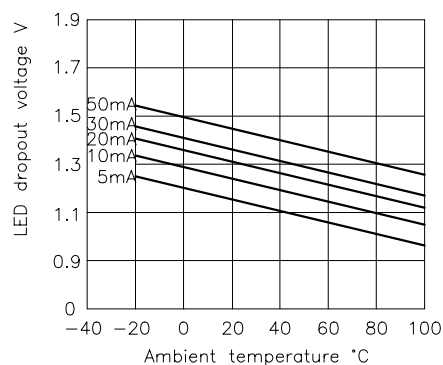


Voltage vs. current characteristics of output at MOS FET portion
Measured portion: across terminals 3 and 4 pin
Ambient temperature: 25°C




Off state leakage current
Across terminals 3 and 4 pin
Ambient temperature: 25°C

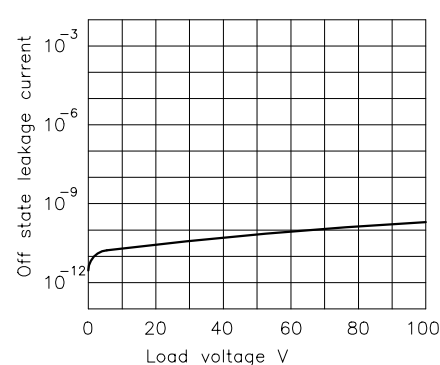

LED forward current vs. turn on time
Across terminals 3 and 4 pin; Load voltage: 400V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25°C

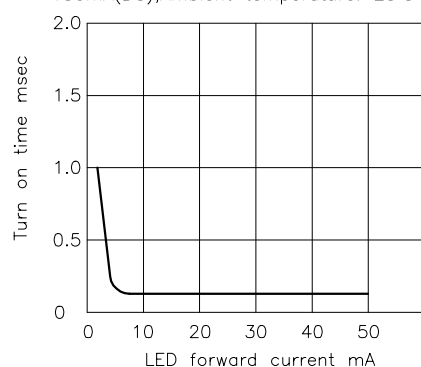

LED forward current vs. turn off time
Across terminals 3 and 4 pin; Load voltage: 400V(DC); Continuous load current: 130mA(DC); Ambient temperature: 25°C

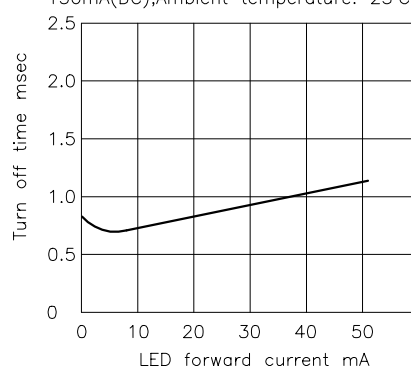

Applied voltage vs. output capacitance
Across terminals 3 and 4 pin
Frequency: 1MHz; Ambient temperature: 25°C

