

HEF4049B

Hex inverting buffers

Rev. 05 — 11 November 2008

Product data sheet

1. General description

The HEF4049B provides six inverting buffers with high current output capability suitable for driving TTL or high capacitive loads. Since input voltages in excess of the buffers' supply voltage are permitted, the buffers may also be used to convert logic levels of up to 15 V to standard TTL levels. Their guaranteed fan-out into common bipolar logic elements is shown in [Table 3](#).

It operates over a recommended V_{DD} power supply range of 3 V to 15 V referenced to V_{SS} (usually ground). Unused inputs must be connected to V_{DD} , V_{SS} , or another input. It is also suitable for use over the industrial (-40°C to $+85^{\circ}\text{C}$) temperature range.

2. Features

- Accepts input voltages in excess of the supply voltage
- Fully static operation
- 5 V, 10 V, and 15 V parametric ratings
- Standardized symmetrical output characteristics
- Operates across the full industrial temperature range -40°C to $+85^{\circ}\text{C}$
- Complies with JEDEC standard JESD 13-B
- ESD protection:
 - ◆ HBM JESD22-A114E exceeds 2000 V
 - ◆ MM JESD22-A115-A exceeds 200 V

3. Applications

- LOCMOS (Local Oxidation CMOS) to DTL/TTL converter
- HIGH sink current for driving two TTL loads
- HIGH-to-LOW level logic conversion

4. Ordering information

Table 1. Ordering information

All types operate from -40°C to $+85^{\circ}\text{C}$.

| Type number | Package | | Version |
|-------------|---------|--|----------|
| | Name | Description | |
| HEF4049BP | DIP16 | plastic dual in-line package; 16 leads (300 mil) | SOT38-4 |
| HEF4049BT | SO16 | plastic small outline package; 16 leads; body width 3.9 mm | SOT109-1 |

5. Functional diagram

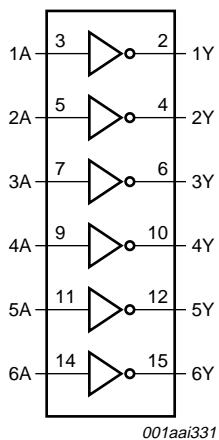


Fig 1. Logic symbol




Fig 2. Logic diagram for one gate




Fig 3. Input protection circuit

6. Pinning information

6.1 Pinning

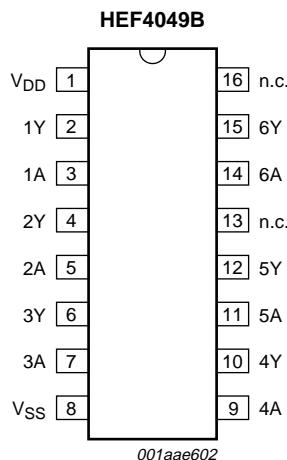


Fig 4. Pin configuration

6.2 Pin description

Table 2. Pin description

| Symbol | Pin | Description |
|-----------------|---------------------|----------------|
| V _{DD} | 1 | supply voltage |
| 1Y to 6Y | 2, 4, 6, 10, 12, 15 | output |

Table 2. Pin description ...continued

| Symbol | Pin | Description |
|-----------------|--------------------|-----------------------|
| 1A to 6A | 3, 5, 7, 9, 11, 14 | input |
| V _{SS} | 8 | ground supply voltage |
| n.c. | 13, 16 | not connected |

7. Functional description

Table 3. Guaranteed fan-out

| Driven element | Guaranteed fan-out |
|----------------|--------------------|
| Standard TTL | 2 |
| 74 LS | 9 |
| 74 L | 16 |

8. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol | Parameter | Conditions | Min | Max | Unit |
|------------------|-------------------------|-----------------------------------|-------|-----------------------|------|
| V _{DD} | supply voltage | | -0.5 | +18 | V |
| V _I | input voltage | any input | -0.5 | V _{DD} + 0.5 | V |
| I _{I/O} | input/output current | | - | ±10 | mA |
| T _{stg} | storage temperature | | -65 | +150 | °C |
| T _{amb} | ambient temperature | | -40 | +85 | °C |
| P _{tot} | total power dissipation | T _{amb} -40 °C to +85 °C | | | |
| | | DIP16 package | [1] - | 750 | mW |
| | | SO16 package | [2] - | 500 | mW |
| P | power dissipation | per output | - | 100 | mW |

[1] For DIP16 package: P_{tot} derates linearly with 12 mW/K above 70 °C.

[2] For SO16 package: P_{tot} derates linearly with 8 mW/K above 70 °C.

9. Recommended operating conditions

Table 5. Recommended operating conditions

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------|-------------------------------------|------------------------|-----|-----|-----------------|------|
| V _{DD} | supply voltage | | 3 | - | 15 | V |
| V _I | input voltage | | 0 | - | V _{DD} | V |
| T _{amb} | ambient temperature | in free air | -40 | - | +85 | °C |
| Δt/ΔV | input transition rise and fall rate | V _{DD} = 5 V | - | - | 3.75 | ns/V |
| | | V _{DD} = 10 V | - | - | 0.5 | ns/V |
| | | V _{DD} = 15 V | - | - | 0.08 | ns/V |

10. Static characteristics

Table 6. Static characteristics $V_{SS} = 0 \text{ V}$; $V_I = V_{SS}$ or V_{DD} unless otherwise specified.

| Symbol | Parameter | Conditions | V_{DD} | $T_{amb} = -40^\circ\text{C}$ | | $T_{amb} = 25^\circ\text{C}$ | | $T_{amb} = 85^\circ\text{C}$ | | Unit |
|----------|--|------------|----------|-------------------------------|-----------|------------------------------|-----------|------------------------------|-----------|---------------|
| | | | | Min | Max | Min | Max | Min | Max | |
| V_{IH} | HIGH-level input voltage $ I_O < 1 \mu\text{A}$ | | 5 V | 3.5 | - | 3.5 | - | 3.5 | - | V |
| | | | 10 V | 7.0 | - | 7.0 | - | 7.0 | - | V |
| | | | 15 V | 11.0 | - | 11.0 | - | 11.0 | - | V |
| V_{IL} | LOW-level input voltage $ I_O < 1 \mu\text{A}$ | | 5 V | - | 1.5 | - | 1.5 | - | 1.5 | V |
| | | | 10 V | - | 3.0 | - | 3.0 | - | 3.0 | V |
| | | | 15 V | - | 4.0 | - | 4.0 | - | 4.0 | V |
| V_{OH} | HIGH-level output voltage $ I_O < 1 \mu\text{A}$ | | 5 V | 4.95 | - | 4.95 | - | 4.95 | - | V |
| | | | 10 V | 9.95 | - | 9.95 | - | 9.95 | - | V |
| | | | 15 V | 14.95 | - | 14.95 | - | 14.95 | - | V |
| V_{OL} | LOW-level output voltage $ I_O < 1 \mu\text{A}$ | | 5 V | - | 0.05 | - | 0.05 | - | 0.05 | V |
| | | | 10 V | - | 0.05 | - | 0.05 | - | 0.05 | V |
| | | | 15 V | - | 0.05 | - | 0.05 | - | 0.05 | V |
| I_{OH} | HIGH-level output current $V_O = 2.5 \text{ V}$ | | 5 V | -1.7 | - | -1.4 | - | -1.1 | - | mA |
| | | | 5 V | -0.52 | - | -0.44 | - | -0.36 | - | mA |
| | | | 10 V | -1.3 | - | -1.1 | - | -0.9 | - | mA |
| | | | 15 V | -3.6 | - | -3.0 | - | -2.4 | - | mA |
| I_{OL} | LOW-level output current $V_O = 0.4 \text{ V}$ | | 4.75 V | 3.5 | - | 2.9 | - | 2.3 | - | mA |
| | | | 10 V | 12.0 | - | 10.0 | - | 8.0 | - | mA |
| | | | 15 V | 24.0 | - | 20.0 | - | 16.0 | - | mA |
| I_I | input leakage current $V_{DD} = 15 \text{ V}$ | | 15 V | - | ± 0.3 | - | ± 0.3 | - | ± 1.0 | μA |
| I_{DD} | supply current $I_O = 0 \text{ A}$ | | 5 V | - | 4.0 | - | 4.0 | - | 30 | μA |
| | | | 10 V | - | 8.0 | - | 8.0 | - | 60 | μA |
| | | | 15 V | - | 16.0 | - | 16.0 | - | 120 | μA |
| C_I | input capacitance | | - | - | - | - | 7.5 | - | - | pF |

11. Dynamic characteristics

Table 7. Dynamic characteristics $V_{SS} = 0 \text{ V}$; $C_L = 50 \text{ pF}$; $t_r = t_f \leq 20 \text{ ns}$; $T_{amb} = 25^\circ\text{C}$; unless otherwise specified.

| Symbol | Parameter | Conditions | V_{DD} | Extrapolation formula | | Min | Typ | Max | Unit |
|-----------|--|------------|----------|-----------------------|---|-----|-----|-----|------|
| t_{PHL} | HIGH to LOW propagation delay nA to nY; see Figure 5 | | 5 V | [1] | $26 \text{ ns} + (0.18 \text{ ns/pF})C_L$ | - | 35 | 70 | ns |
| | | | 10 V | [1] | $11 \text{ ns} + (0.08 \text{ ns/pF})C_L$ | - | 15 | 30 | ns |
| | | | 15 V | [1] | $9 \text{ ns} + (0.05 \text{ ns/pF})C_L$ | - | 12 | 25 | ns |
| t_{PLH} | LOW to HIGH propagation delay nA to nY; see Figure 5 | | 5 V | [1] | $23 \text{ ns} + (0.55 \text{ ns/pF})C_L$ | - | 50 | 100 | ns |
| | | | 10 V | [1] | $14 \text{ ns} + (0.23 \text{ ns/pF})C_L$ | - | 25 | 50 | ns |
| | | | 15 V | [1] | $12 \text{ ns} + (0.16 \text{ ns/pF})C_L$ | - | 20 | 40 | ns |

Table 7. Dynamic characteristics ...continued $V_{SS} = 0 \text{ V}$; $C_L = 50 \text{ pF}$; $t_r = t_f \leq 20 \text{ ns}$; $T_{amb} = 25^\circ\text{C}$; unless otherwise specified.


| Symbol | Parameter | Conditions | V_{DD} | Extrapolation formula | Min | Typ | Max | Unit |
|-----------|------------------------------------|------------------------------|----------|--------------------------------|-----|-----|-----|------|
| t_{THL} | HIGH to LOW output transition time | see Figure 5 | 5 V | [1] 3 ns + (0.35 ns/pF) C_L | - | 20 | 40 | ns |
| | | | 10 V | 3 ns + (0.14 ns/pF) C_L | - | 10 | 20 | ns |
| | | | 15 V | 2 ns + (0.09 ns/pF) C_L | - | 7 | 14 | ns |
| t_{TLH} | LOW to HIGH output transition time | see Figure 5 | 5 V | [1] 10 ns + (1.00 ns/pF) C_L | - | 60 | 120 | ns |
| | | | 10 V | 9 ns + (0.42 ns/pF) C_L | - | 30 | 60 | ns |
| | | | 15 V | 6 ns + (0.28 ns/pF) C_L | - | 20 | 40 | ns |

[1] The typical values of the propagation delay and transition times are calculated from the extrapolation formulas shown (C_L in pF).

Table 8. Dynamic power dissipation P_D P_D can be calculated from the formulas shown. $V_{SS} = 0 \text{ V}$; $t_r = t_f \leq 20 \text{ ns}$; $T_{amb} = 25^\circ\text{C}$.

| Symbol | Parameter | V_{DD} | Typical formula for P_D (μW) | where: |
|--------|---------------------------|----------|---|---|
| P_D | dynamic power dissipation | 5 V | $P_D = 2500 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ | f_i = input frequency in MHz; |
| | | 10 V | $P_D = 11000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ | f_o = output frequency in MHz; |
| | | 15 V | $P_D = 35000 \times f_i + \Sigma(f_o \times C_L) \times V_{DD}^2$ | C_L = output load capacitance in pF; V_{DD} = supply voltage in V; $\Sigma(C_L \times f_o)$ = sum of the outputs. |

12. Waveforms

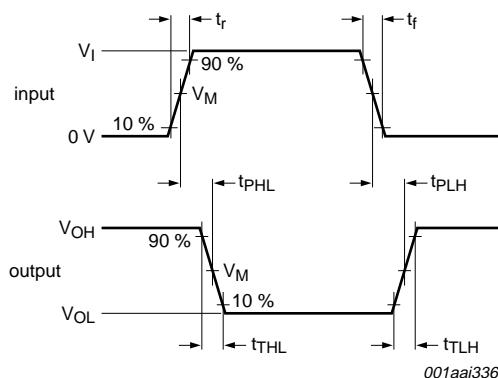


Measurement points are given in [Table 9](#).

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 5. Input (nA) to output (nY) propagation delays and transition times**Table 9. Measurement points**

| Input | Output | | | |
|--------------|-----------------|--------------|--------------|--------------|
| V_M | V_I | V_M | V_X | V_Y |
| 0.5 V_{DD} | 0 V to V_{DD} | 0.5 V_{DD} | 0.1 V_{DD} | 0.9 V_{DD} |

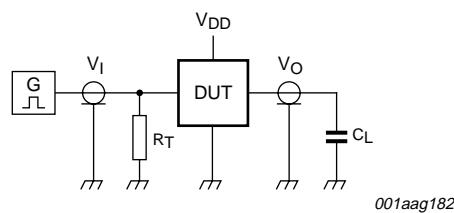

Test data is given in [Table 10](#).

Definitions for test circuit:

C_L = Load capacitance including jig and probe capacitance.

R_T = Termination resistance should be equal to output impedance Z_o of the pulse generator.

Fig 6. Load circuitry for switching times

Table 10. Test data

| Supply voltage | Input | | | Load |
|----------------|----------|----------|--------------|-------|
| | V_I | V_M | t_r, t_f | |
| 5 V to 15 V | V_{DD} | $0.5V_I$ | ≤ 20 ns | 50 pF |

13. Package outline

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

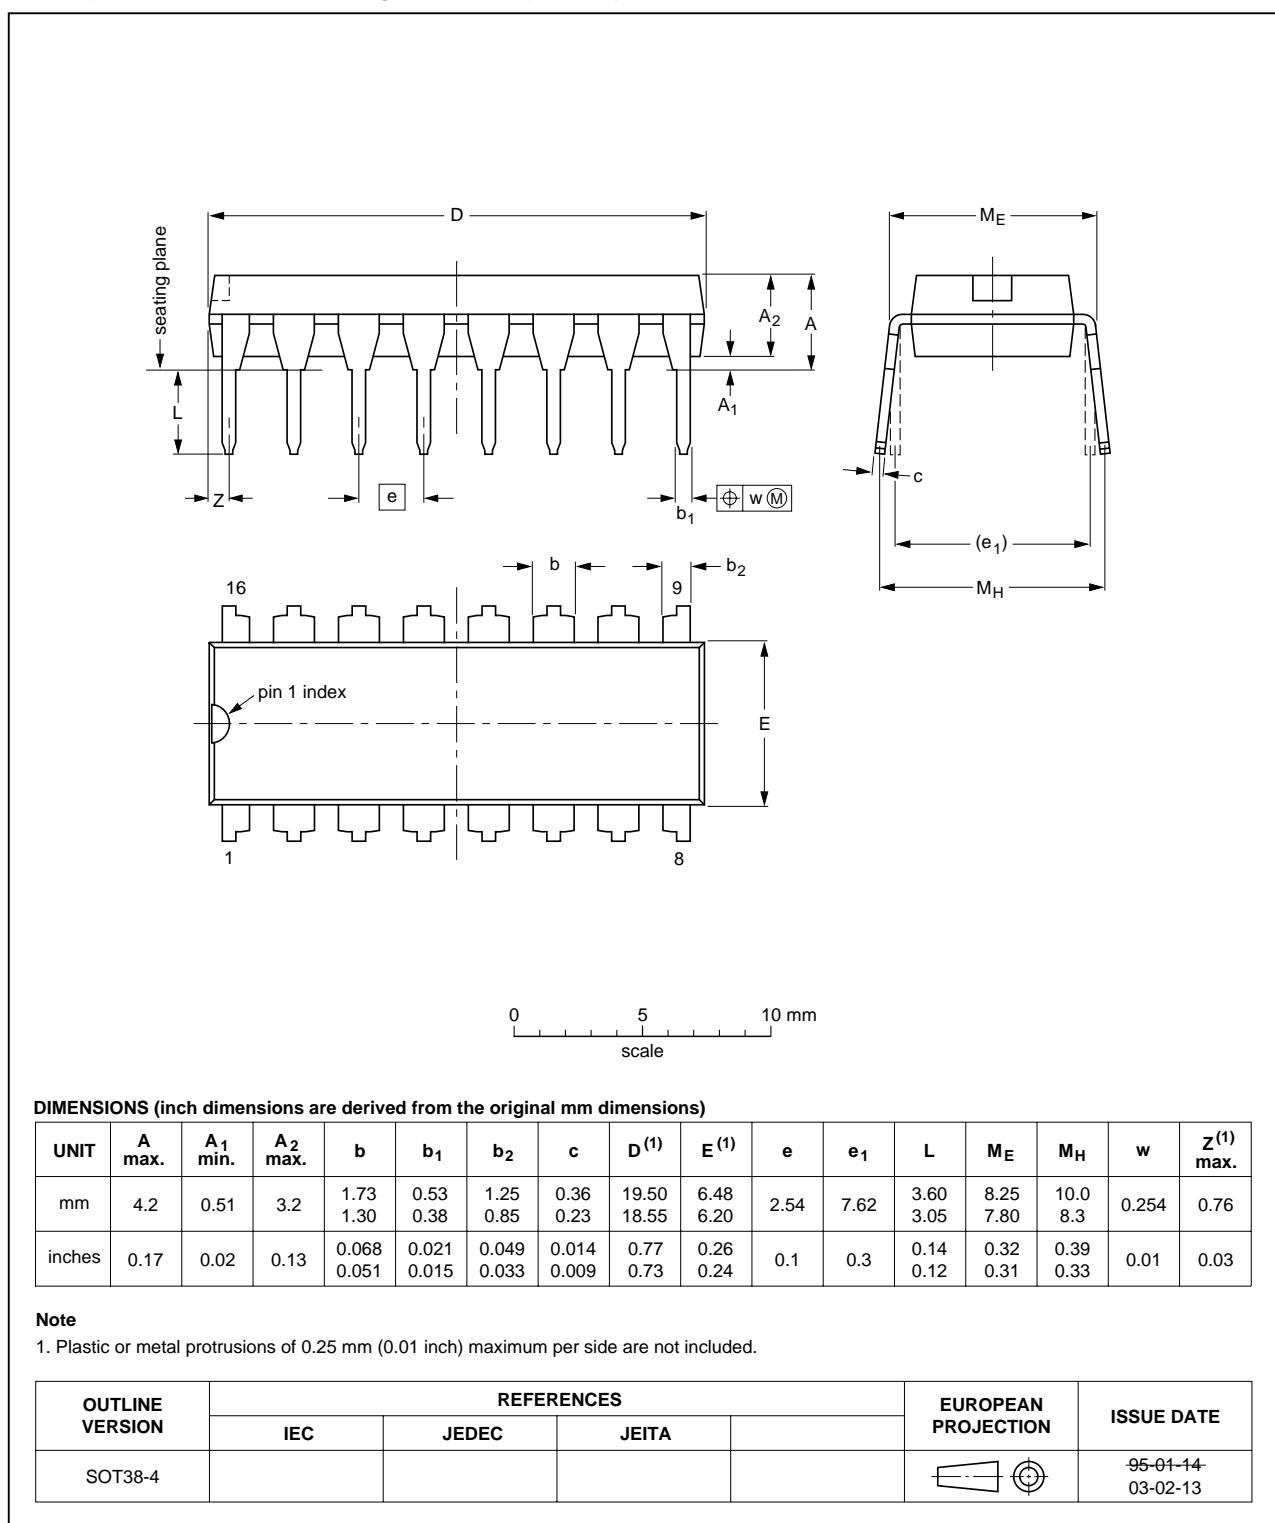


Fig 7. Package outline SOT38-4 (DIP16)

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

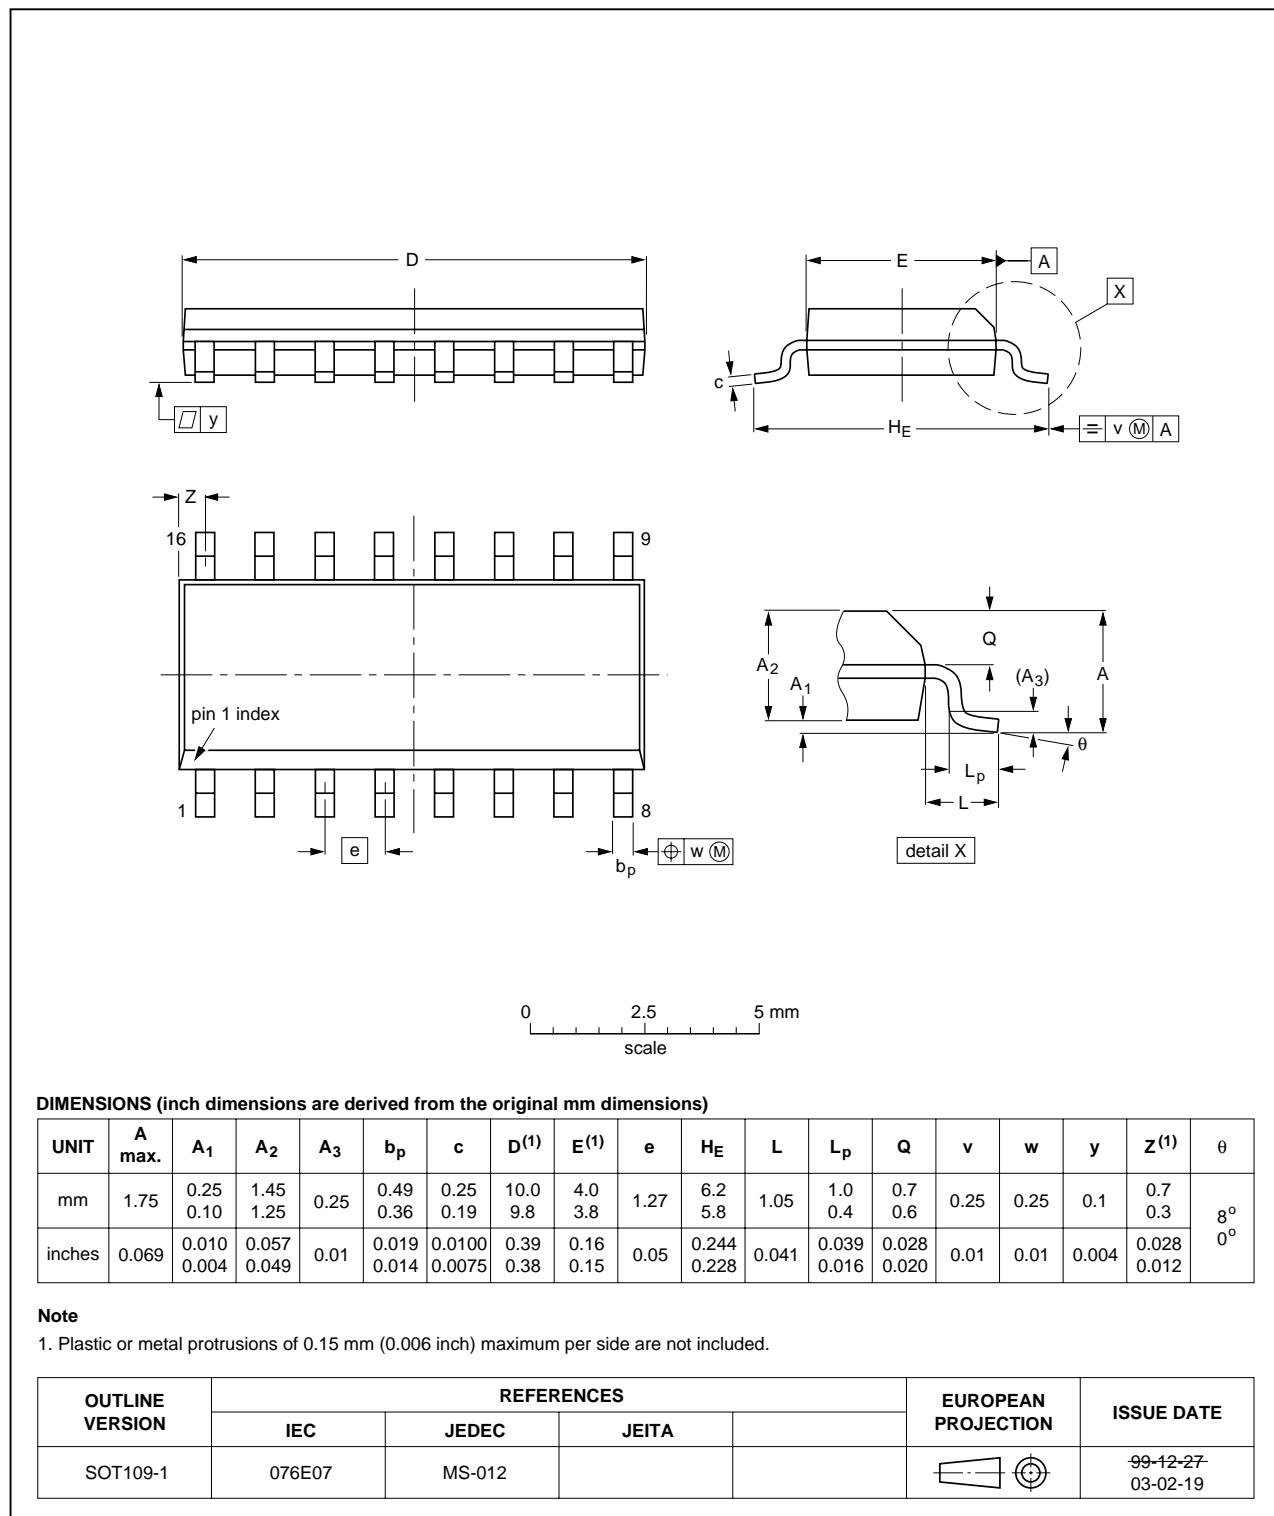


Fig 8. Package outline SOT109-1 (SO16)

14. Abbreviations

Table 11. Abbreviations

| Acronym | Description |
|---------|-----------------------------|
| DUT | Device Under Test |
| DTL | Diode Transistor Logic |
| ESD | ElectroStatic Discharge |
| HBM | Human Body Model |
| LOCMOS | Local Oxidation CMOS |
| MM | Machine Model |
| TTL | Transistor Transistor Logic |

15. Revision history

Table 12. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|----------------|--------------|-----------------------|---------------|--|
| HEF4049B_5 | 20081111 | Product data sheet | - | HEF4049B_4 |
| Modifications: | | | | <ul style="list-style-type: none"> • Maximum T_{amb} changed to 85 °C and $T_{amb} = 125$ °C parameter data removed throughout. • Section 1 “General description” temperature range statement modified. • Section 10 “Static characteristics” I_{DD}, I_{OL}, I_{OH}, and I_I values updated. |
| HEF4049B_4 | 20080704 | Product data sheet | - | HEF4049B_CNV_3 |
| HEF4049B_CNV_3 | 19950101 | Product specification | - | HEF4049B_CNV_2 |
| HEF4049B_CNV_2 | 19950101 | Product specification | - | - |

16. Legal information

16.1 Data sheet status

| Document status ^{[1][2]} | Product status ^[3] | Definition |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

16.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfuction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

17. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

18. Contents

| | | |
|------|--|----|
| 1 | General description | 1 |
| 2 | Features | 1 |
| 3 | Applications | 1 |
| 4 | Ordering information | 1 |
| 5 | Functional diagram | 2 |
| 6 | Pinning information | 2 |
| 6.1 | Pinning | 2 |
| 6.2 | Pin description | 2 |
| 7 | Functional description | 3 |
| 8 | Limiting values | 3 |
| 9 | Recommended operating conditions | 3 |
| 10 | Static characteristics | 4 |
| 11 | Dynamic characteristics | 4 |
| 12 | Waveforms | 5 |
| 13 | Package outline | 7 |
| 14 | Abbreviations | 9 |
| 15 | Revision history | 9 |
| 16 | Legal information | 10 |
| 16.1 | Data sheet status | 10 |
| 16.2 | Definitions | 10 |
| 16.3 | Disclaimers | 10 |
| 16.4 | Trademarks | 10 |
| 17 | Contact information | 10 |
| 18 | Contents | 11 |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

founded by

PHILIPS

© NXP B.V. 2008.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 11 November 2008

Document identifier: HEF4049B_5